



SPECIFICATION SHEET

56-633



MAXICHEM® CUT™ BY ATG®

- Chemical resistance delivered through the ATG® LiquiTech® technology platform
- Innovative fibers - we source our base ingredients to develop our own unique high performance yarns and fibers that offer cut protection whilst maintaining high levels of comfort
- Ultra lightweight synthetic coating combined with an industry leading super light seamless knit liner provides excellent comfort, sensitivity, fit and dexterity
- Tailored cuff keeps the cuff close to your hand so maintaining your fingers at the tip of the glove to maximize dexterity
- Micro-cup non-slip grip finish allows for a controlled and superior grip in oily and wet applications. The nonslip grip is only applied where it is actually needed - in the palm area - to ensure flexibility isn't compromised
- All ingredients used in the manufacturing and construction of this product are compliant with the REACH legislation
- This glove has been laundered prior to final packaging making it clean and safe for use
- The Skin Health Alliance has awarded professional dermatological accreditation following review of the scientific dossier behind this product

APPLICATIONS

- Gear box assembly
- General handling & handling small castings
- Handling of small components
- Light metal fabrication & parts handling
- Primary, secondary and final assembly
- Shock absorber assembly
- Maintenance

CARE INSTRUCTIONS

Use commercial laundry soap or detergent (do NOT use dry cleaning solutions) Wash in warm to medium hot water, do not exceed 104°F (40° C). Wash for 10 minutes and rinse in cold water. Repeat wash and rinse if soiling is especially heavy. Tumble dry - maximum temperature 140°F (60° C)

TECHNICAL DATA

| | | | | | |
|---------------------|---|--------------------|---------------------|-------------------|---------------------|
| MATERIAL | Seamless knit engineered yarn, micro-foam nitrile coating | | | | |
| COLOR | Shell: ■ Green / Grip: ■ Black / Liner: □ White | | | | |
| CUFF STYLE | Gauntlet cuff | | | | |
| SIZES | S - XXL | | | | |
| PACKAGING | 1 dozen per polybag, 6 dozen per case | | | | |
| CASE | 19.7" x 11.6" x 10.6" / 50cm x 29.5cm x 27cm | | | | |
| CASE WEIGHT (S-XXL) | S | M | L | XL | XXL |
| | 20.9 lbs 9.5 kg | 22.5 lbs 10.2kg | 23.6 lbs 10.7 kg | 24.3 lbs 11 kg | 25.4 lbs 11.5 kg |
| COO | Sri Lanka | | | | |

PERFORMANCE PROPERTIES

| | | | | | | |
|-------------|--------------------------------|---|---|---|---|---|
| EN388: 4342 | ASTM F1790-05 ANSI Cut Level 2 | | | | | |
| ABRASION | 0 | 1 | 2 | 3 | 4 | - |
| CUT | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR | 0 | 1 | 2 | 3 | 4 | - |
| PUNCTURE | 0 | 1 | 2 | 3 | 4 | - |




BARCODES

| ITEM | PAIR | DOZEN | CASE |
|--------------|--------------|----------------|----------------|
| ■ 56-633/S | 616314159732 | 01616314159731 | 02616314159730 |
| ■ 56-633/M | 616314159725 | 01616314159724 | 02616314159723 |
| ■ 56-633/L | 616314159718 | 01616314159717 | 02616314159716 |
| ■ 56-633/XL | 616314159749 | 01616314159748 | 02616314159747 |
| ■ 56-633/XXL | 616314159756 | 01616314159755 | 02616314159754 |

DIMENSIONS (in/cm)

| | S | M | L | XL | XXL |
|----------|-------------|-------------|-------------|-------------|-------------|
| A | 12.0 / 30.5 | 12.0 / 30.5 | 12.0 / 30.5 | 12.0 / 30.5 | 12.0 / 30.5 |
| B | 4.1 / 10.4 | 4.3 / 10.8 | 4.4 / 11.2 | 4.6 / 11.6 | 4.7 / 12.0 |

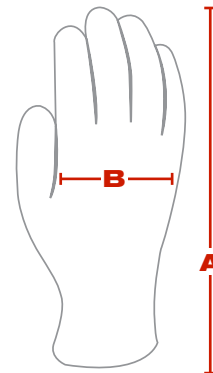

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.