


XGLO[®] and LightSystem[®] Jumpers & Pigtails

XGLO fiber optic cable assemblies are ideal for supporting duplex and simplex fiber applications over extended distances and next-generation backbones. XGLO cable assemblies feature premium fiber that meets IEC-60793-2-10, TIA-492AAAC (OM3) and TIA-492AAD (OM4) specifications. In addition, these assemblies offer a superior connector polish that meets stringent Telcordia and ISO/IEC specifications for end-face geometry and exceeds all ANSI/TIA and ISO/IEC insertion loss and return loss requirements. The XGLO singlemode jumpers and pigtails are also available in angled polish (APC) for FTXX, PON, POL, CATV LAN and WAN. These precision cable assemblies are warranted for 20 years when installed in a qualified Siemon XGLO or LightSystem. 100% inspection ensures superior performance and quality.

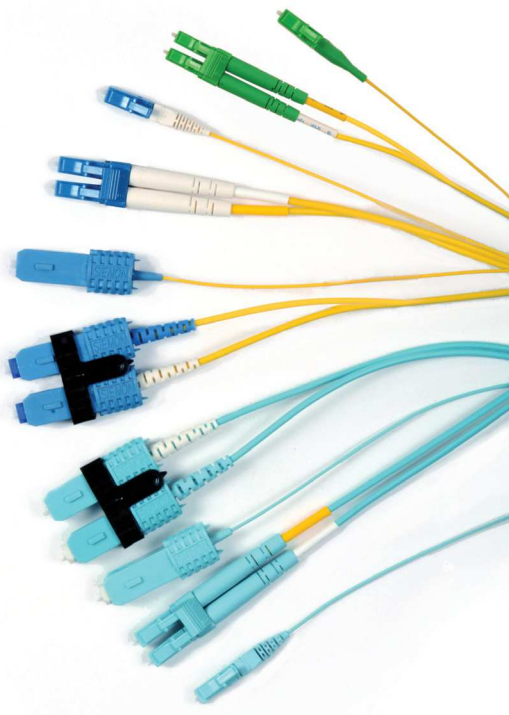

Fiber Type – OM1, OM3, OM4, OS1/OS2

Polarity Correction – SC and LC duplex clip allows for polarity correction

Exceeds Requirements – Exceeds TIA/EIA and ISO/IEC requirements for aging, exposure to humidity, temperature extremes, impact, vibration, coupling strength, and cable resistance to stress and strain

APC Connectivity – Complies with Telcordia GR-326-CORE issue 4

*Tested in accordance with the Service Life requirements of Telcordia GR-326-CORE issue 4.

* LC 900µm simplex pigtails are TIA/EIA and ISO/IEC compliant.



Bulk Pack Pigtails – Convenient protective plastic bulk packaging reduces waste


- 12 pack SC
- 12/24 pack LC
- TIA colour code pack 1 -12 colours

PERFORMANCE SPECIFICATIONS


	OM1 - 62.5/125µm Multimode			OM3 50/125µm Multimode			OM4 50/125µm Multimode			OS1/OS2 Singlemode (UPC)	OS1/OS2 Singlemode (APC)
Wavelength (nm)	850	1300		850	1300	850*	850	1300	850*	1310/1550nm	1310/1550nm
Min. Cable Bandwidth (MHz*km)	200	500		1500 (OFL)	500 (OFL)	2000 (EMB)	3500 (OFL)	500 (OFL)	4700 (EMB)	N/A	N/A
Max. Insertion Loss (dB)	0.50 (0.15 Typical)			0.25 (0.10 Typical)			0.25 (0.10 Typical)			0.40 (0.10 Typical)	0.40 (0.15 Typical)
Min. Return Loss (dB)	25 (30 Typical)			30 (35 Typical)			30 (35 Typical)			55 (60 Typical)	65 (70 Typical)

* Laser bandwidth

XGLO® Multimode OM3 and OM4 Duplex Jumpers

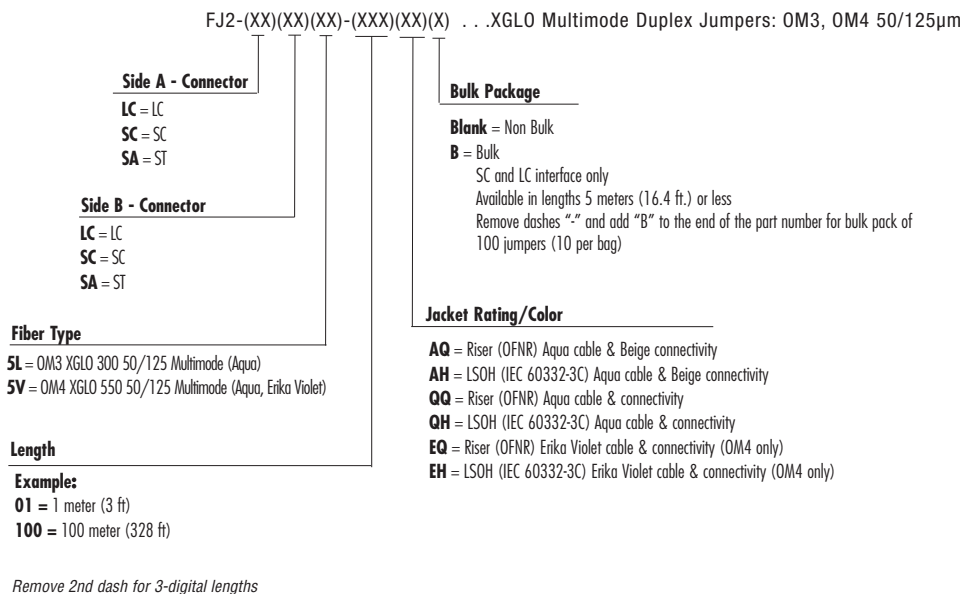


XGLO® Multimode OM3 and OM4 900µm Buffered Simplex Pigtails

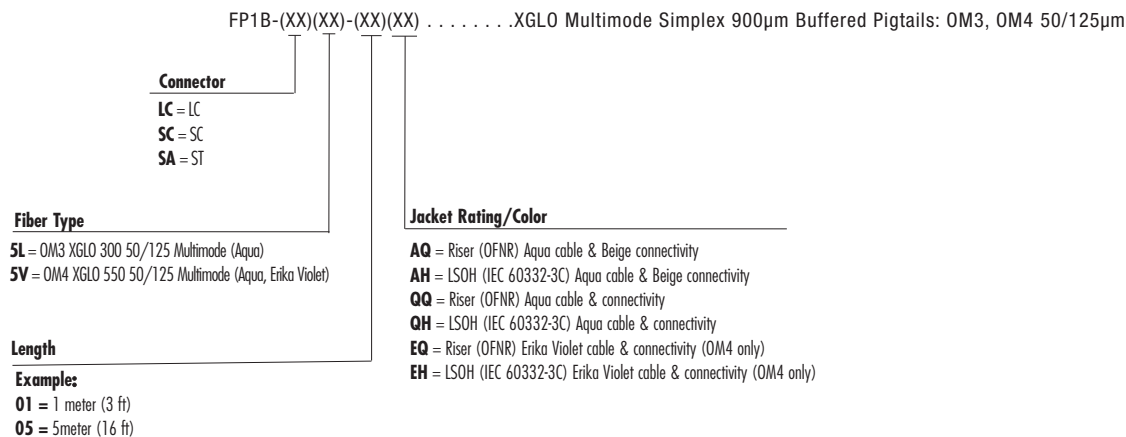


Custom lengths and jacket colours are available upon request. Contact our Customer Service Department for more information.
Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.
XGLO® and LightSystem® are trademarks of Siemon



XGLO® Singlemode OS1/OS2 Duplex Jumpers

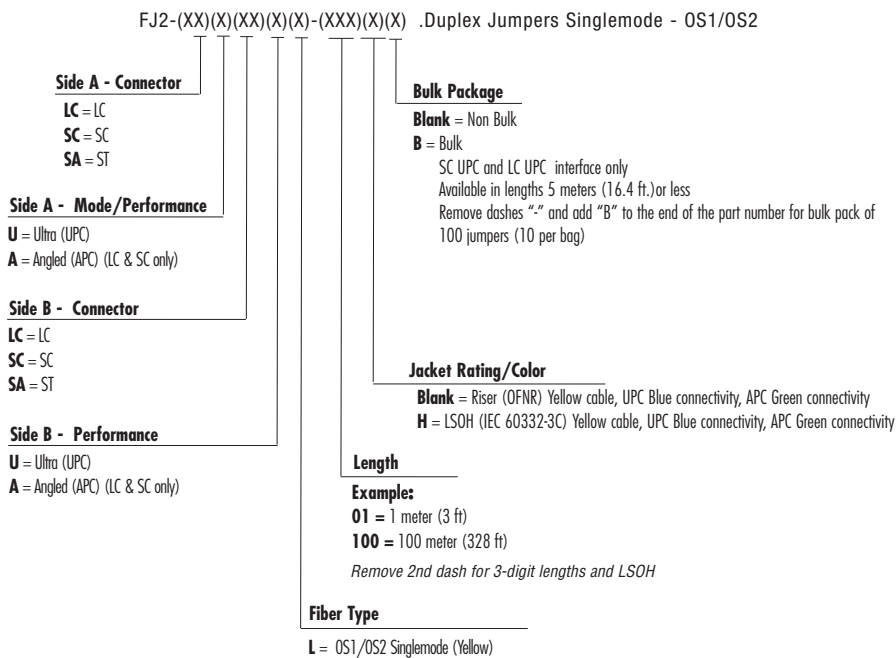


XGLO® Singlemode OS1/OS2 900µm Buffered Simplex Pigtails

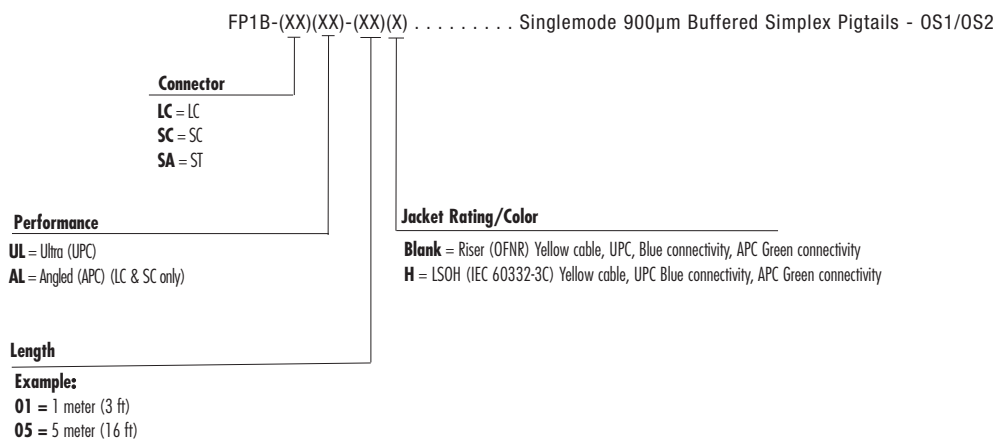


Custom lengths and jacket colours are available upon request. Contact our Customer Service Department for more information.
Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.
XGLO® and LightSystem® are trademarks of Siemon



LightSystem 62.5 µm Multimode OM1 Duplex Jumpers

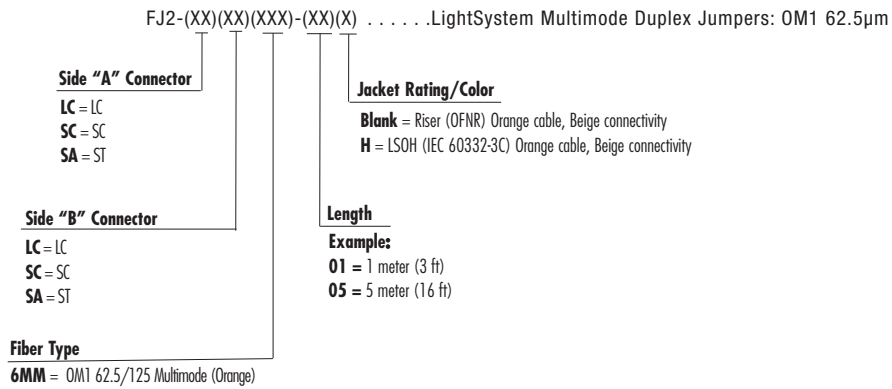

LightSystem 62.5 µm Multimode OM1 900µm Buffered Simplex Pigtails

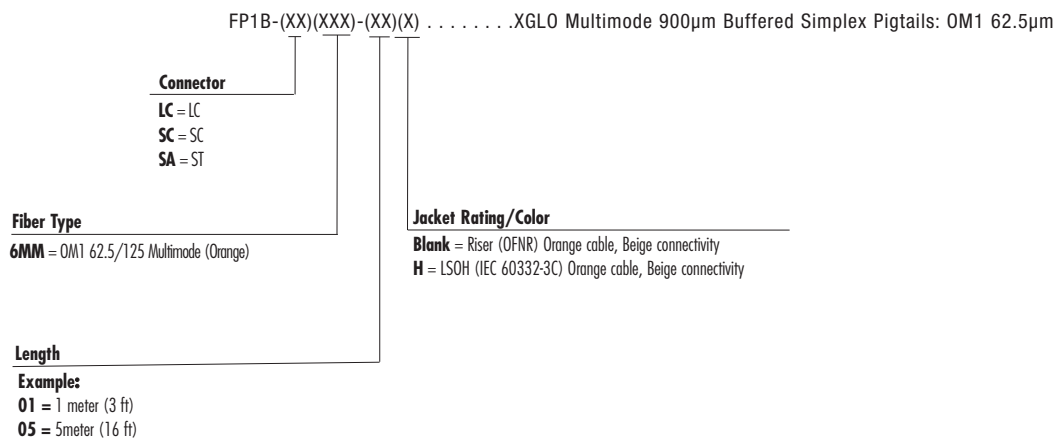

Custom lengths and jacket colors are available upon request. Contact our Customer Service Department for more information.
Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.
XGLO® and LightSystem® are trademarks of Siemon

Bulk Fiber 900µm Buffered Pigtails, Singlemode OS1/OS2 and Multimode OM3/OM4



FPB(XXX)(XX)(XX)(XX)(X)XGLO Bulk Fiber Pigtails

Pack Quantity

12 = 12 Pigtails

24 = 24 Pigtails (LC only)

Jacket color:

Aqua OM3/OM4, Erika Violet OM4, Yellow OS1/OS2

T12 = 12 Pigtails TIA color code

T24 = 24 Pigtails TIA color code (LC only)

Jacket color:

Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua

Connector

LC = LC

SC = SC

Mode/Performance

5L = OM3 XGLO 300 50/125 Multimode

5V = OM4 XGLO 550 50/125 Multimode

UL = Ultra (UPC) Singlemode

AL = Angled (APC) Singlemode

Bulk Package

B = Bulk

Available in lengths 5 meters (16.4 ft.) or less

Jacket Rating/Connectivity Color

Blank = Riser (OFNR) UPC Blue, APC Green, OS1/OS2

H = LSOH (IEC 60332-3C) UPC Blue, APC Green, OS1/OS2

AQ = Riser (OFNR) Beige connectivity, OM3/OM4

AH = LSOH (IEC 60332-3C) Beige connectivity, OM3/OM4

QQ = Riser (OFNR) Aqua connectivity, OM3/OM4

QH = LSOH (IEC 60332-3C) Aqua connectivity, OM3/OM4

EQ = Riser (OFNR) Erika Violet connectivity (OM4 only)

EH = LSOH (IEC 60332-3C) Erika Violet connectivity (OM4 only)

Length

Example:

01 = 1 meter (3 ft)

05 = 5 meter (16 ft)

Custom lengths and jacket colors are available upon request. Contact our Customer Service Department for more information.
Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.
XGLO® and LightSystem® are trademarks of Siemon



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters

North America

Watertown, CT USA
Phone (1) 860 945 4200

Regional Headquarters

Europe Russia Africa

Chertsey, Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters

China

Shanghai, P.R. China
Phone (86) 215385 0303

Regional Headquarters

Latin America

Bogota, Colombia
Phone (571) 657 1950/51/52

Regional Headquarters

India Middle East

Dubai, United Arab Emirates
Phone (971) 4 3689743

Regional Headquarters

Asia Pacific

Sydney, Australia
Phone (61) 2 8977 7500

Siemon Interconnect Solutions

Watertown, CT USA

Phone (1) 860 945 4213 US
www.siemon.com/SIS