MIC® Tight-Buffered Cable, Plenum 4 F, 62.5 µm multimode (OM1)

Part Number:
004K88-31130-29


Corning MIC® plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 µm buffered fibers to allow easy, consistent stripping and to facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket. The all-dielectric cable construction requires no grounding or bonding. MIC plenum cables are ideal for routing inside buildings, within plenum areas and riser shafts, to the telecommunications rooms and workstations. The MIC plenum cables meet the application requirements of the National Electrical Code® (NEC®) Article 770 and are OFNP and FT-6 listed.

Features and Benefits


900 µm buffered fibers
Easy, consistent stripping

All-dielectric construction
Requires no grounding or bonding

Flame-retardant jacket
Rugged and durable

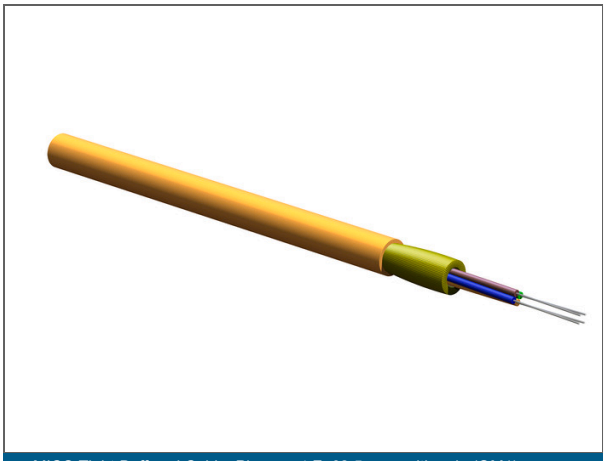

MIC® Tight-Buffered Cable, Plenum, 4 F, 62.5 µm multimode (OM1)

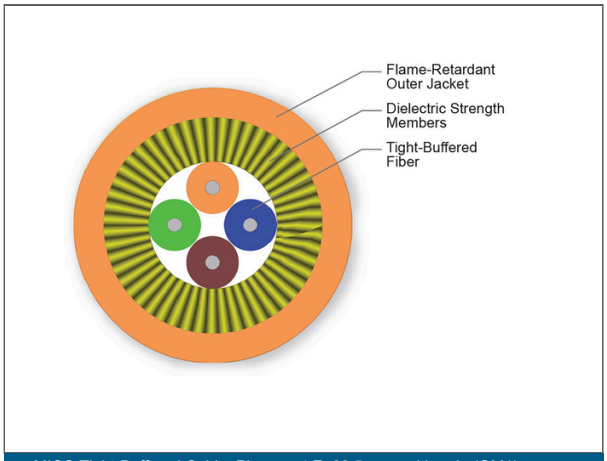

MIC® Tight-Buffered Cable, Plenum, 4 F, 62.5 µm multimode (OM1)

MIC® Tight-Buffered Cable, Plenum 4 F, 62.5 µm multimode (OM1)

Specifications

General Specifications	
Installation Methods	Horizontal, Plenum, Riser
Cable Type	Tight-Buffered
Environment	Indoor
Product Type	Distribution
Fiber Category	62.5 µm MM (OM1)
Flame Rating	Plenum (OFNP)
Cable geometry	Round

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	National Electrical Code® (NEC®) OFNP, NFPA 262, CSA FT-6
Design and Test Criteria	ICEA S-83-596

Environmental Conditions	
Temperature Range, Installation	0 °C to 60 °C (32 °F to 140 °F)
Temperature Range, Operation	0 °C to 70 °C (32 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	4
Outer Jacket Color	Orange
Outer Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tight Buffer Color	Blue, Orange, Green, Brown

MIC® Tight-Buffered Cable, Plenum 4 F, 62.5 µm multimode (OM1)

CORNING

Cable Design	
Flame Rating	Plenum (OFNP)

Mechanical Specifications	
Max. Tensile Strength, Long-Term, ≤12F	132 N (29.67 lbf)
Max. Tensile Strength, Long-Term, >12F	200 N (44.96 lbf)
Max. Tensile Strength, Short-Term, ≤12F	440 N (98.92 lbf)
Max. Tensile Strength, Short-Term, >12F	660 N (148.37 lbf)
Min. Bend Radius Installation	78 mm (3.07 in)
Min. Bend Radius Operation	52 mm (2.05 in)
Nominal Outer Diameter	5.2 mm (0.2 in)

Optical Characteristics	
Fiber Code	K
Performance Option Code	30
Fiber Category	OM1
Fiber Type	Multimode
Fiber Name	62.5 µm MM (OM1)
Maximum Attenuation	3.4 dB/km / 1.0 dB/km
Wavelengths	850 nm / 1300 nm
Fiber Compliance	ISO/IEC 11801
Fiber Core Diameter	62.5 µm
Coating diameter	242 µm
Serial 1 Gigabit Ethernet	300 m / 550 m
Serial 10 Gigabit Ethernet	33 m / -
Minimum Effective Modal Bandwidth (EMB)	220 MHz*km / -
Min. Overfilled Launch (OFL) Bandwidth	200 MHz*km / 500 MHz*km

MIC® Tight-Buffered Cable, Plenum 4 F, 62.5 µm multimode (OM1)

Dimensions	
Cable Weight	222 kg/km (149.18 lb/1000 ft)

RoHS COMPLIANT

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.