

Hubbell-PRO

60/63 A, 125/250 VAC, 3-POLE, 4-WIRE

Watertight Inlet

HUBBELL

- Features
- IP67 environmental ratings
  - Impact and corrosion resistant insulated non-metallic housing
  - Sequential contact engagement to prevent a momentary over-voltage
  - Color coded housings provide quick identification of mating devices
  - Shrouded pins to protect from impact and abuse

Ordering Information

|             |                                               |              |                |
|-------------|-----------------------------------------------|--------------|----------------|
|             | Heavy Duty<br>Products, IEC Pin<br>and Sleeve | UPC          | Catalog Number |
| Description | Color                                         | 783585675626 | C460B9WA       |

Listings


All constructions are UL Listed & cUL Listed  
FileE14632  
UL1686 Standard for Pin & Sleeve Configurations  
VDE, CE

Specifications

|             |                           |
|-------------|---------------------------|
| Application | High Ampacity Connections |
| Connection  | Pressure Screw Terminal   |
| Wire Size   | #6AWG to #4AWG            |
| Material    | PBT                       |
| Mounting    | Screw Mount               |

Performance

|                         |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| Electrical              |                                                                                     |
| Dielectric Voltage      | Withstand 3000V AC                                                                  |
| Max. Working Voltage    | 600V AC RMS                                                                         |
| Mechanical              |                                                                                     |
| Impact Resistance       | Per CSA C22.2 No. 182.1 / UL1682                                                    |
| Product Identification  | Identification and ratings are marked on device housing                             |
| Terminal Identification | Terminals identified in accordance with North American and IEC conventions          |
| Environmental           |                                                                                     |
| Flammability            | HB                                                                                  |
| Ingress Protection      | IP67                                                                                |
| Moisture Resistance     | IEC 60309-1                                                                         |
| Temperature Rating      | Maximum Continuous: 75° C; Minimum Continuous: -40° C w/o impact, -25° with impact. |

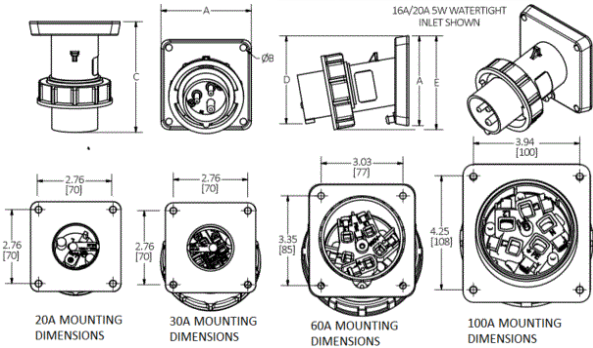

Complementary Products

Complementary Products Adapter Plate, Back Box

Online Resources

Customer Sales Drawings  
eCatalog  
Installation Instructions

